



—For demagnetization of permanent magnet—

## Demagnetizing Coil (Epoxy Resin mold type)


- Have distinguished durability for high voltage / heavy-current power from demagnetizing electric power supply to do a full mold in epoxy resin.
- Most of the impulsive sound and the vibrations to occur at the time of demagnetizing discharge do not occur.
- Can produce the water cooling type demagnetization coil which adopted a coil made by copper pipe. High takt continuous service in a production line is possible.
- As requested, we can do design and manufacture of demagnetizing coils such as axial-style, transverse-style, twin coil-style.
- Can use it as magnetizing coil.

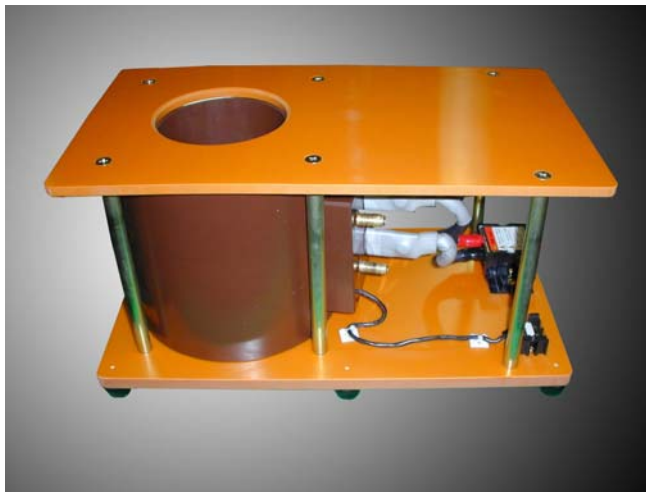

Water-cooling type demagnetizing coil,  
axial-style

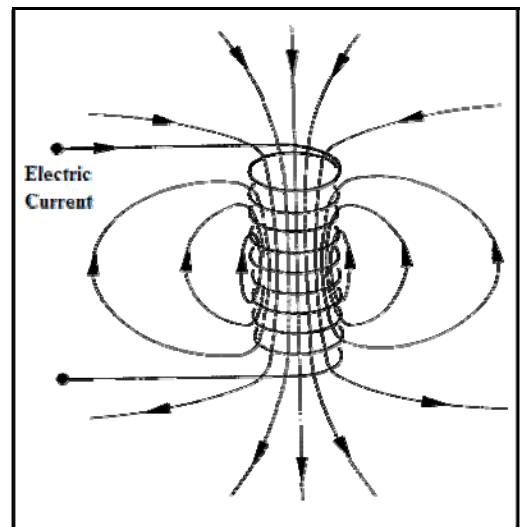

The magnetic field  
which occurs with demagnetizing coil

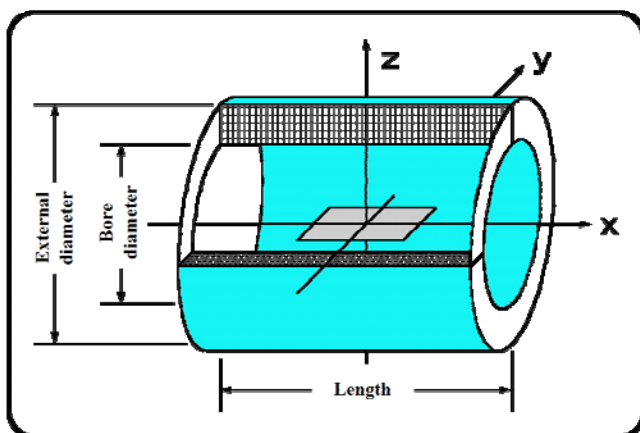

About demagnetizing power supply which you use	V	$\mu$ F	A
Necessary demagnetic field	X mm	Y mm	Z mm mT over
Bore diameter and length	$\phi$	mm/L	mm
T a k t	Once energization	second rest	
Magnet specification and configuration of demagnetizing object			

Refer to upper diagram, and please inform our sales person of the topic that is necessary for design of coil. We do design and estimate of the most suitable demagnetizing coil.



**Magnet Force Co., Ltd.**

20-12, Enoki-cho, Suita City, Osaka  
564-0053 JAPAN

TEL 81-6-6378-8484 FAX 81-6-6378-8488

info@magnetforce.co.jp

http://www.magnetforce.co.jp